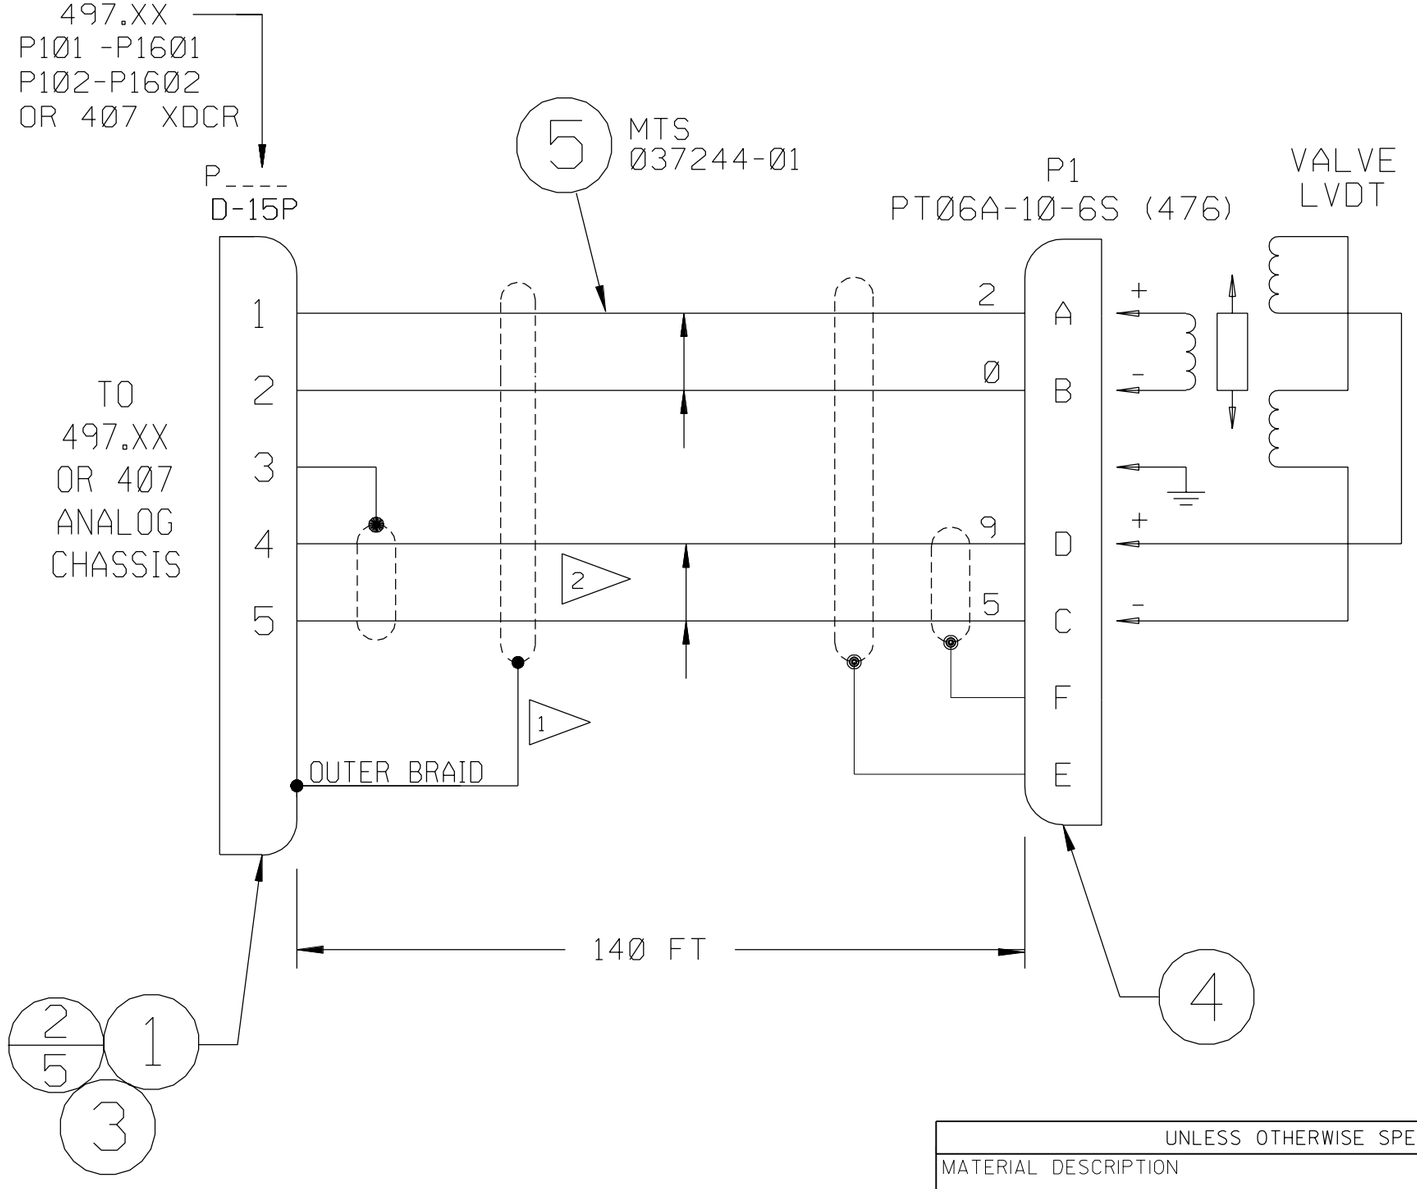


NOTE:

1. FOLD OUTER BRAIDED SHIELD OVER CABLE JACKET IN BACKSHELL CLAMP AREA AND APPLY CLAMP OVER THE BRAID.
2. PHASING IS ACCOMPLISHED ON 497 MODULE, SEE INSTRUCTION MANUAL.

REVISIONS				
DESCRIPTION	DRAWN	APPVL	DATE	LETTER / ECN NO.

SOURCE/REF DRAWING: 464408-XX

PROPRIETARY DATA

The information and design(s) disclosed herein are the property of MTS Systems Corporation and may not be used, reproduced or disclosed in any form except as granted in writing by MTS Systems Corporation. This restriction excludes information that is in the public domain or was legitimately in the prior possession of the recipient.

UNLESS OTHERWISE SPECIFIED

MATERIAL DESCRIPTION

MATERIAL SIZE

FINISH — MASK M

- THREAD DEPTHS ARE TO MIN FULL THDS
- DRILL DEPTHS ARE TO FULL DIA
- REMOVE BURRS AND SHARP EDGES
- DO NOT SCALE PRINT

SCALE NONE

MACHINED SURFACES 180 √

MTS® MTS SYSTEMS CORPORATION
EDEN PRAIRIE, MINNESOTA U.S.A. ©

.XXX HOLE SIZE TOLERANCE

0.000 TO .750 +.010/-.002	OVER .750 TO 1.500 +.015/-.003

GENERAL TOLERANCES

ANGLE	±2°
X/Y	±1/4
.X	±.1
.XX	±.03
.XXX	±.010

THIRD ANGLE PROJ.

DRAWN	CHECK	ENGR	MFG
DCJ		RLL	
DATE 8-1-00	DATE	DATE 8-00	DATE

TITLE
CABLE ASSEMBLY-
VALVE LVDT - 140FT

NEXT LEVEL

PRODUCT CODE ASDPRJ

SIZE	NUMBER	REV
B	100-043-416	A

SHEET 1 OF 1