


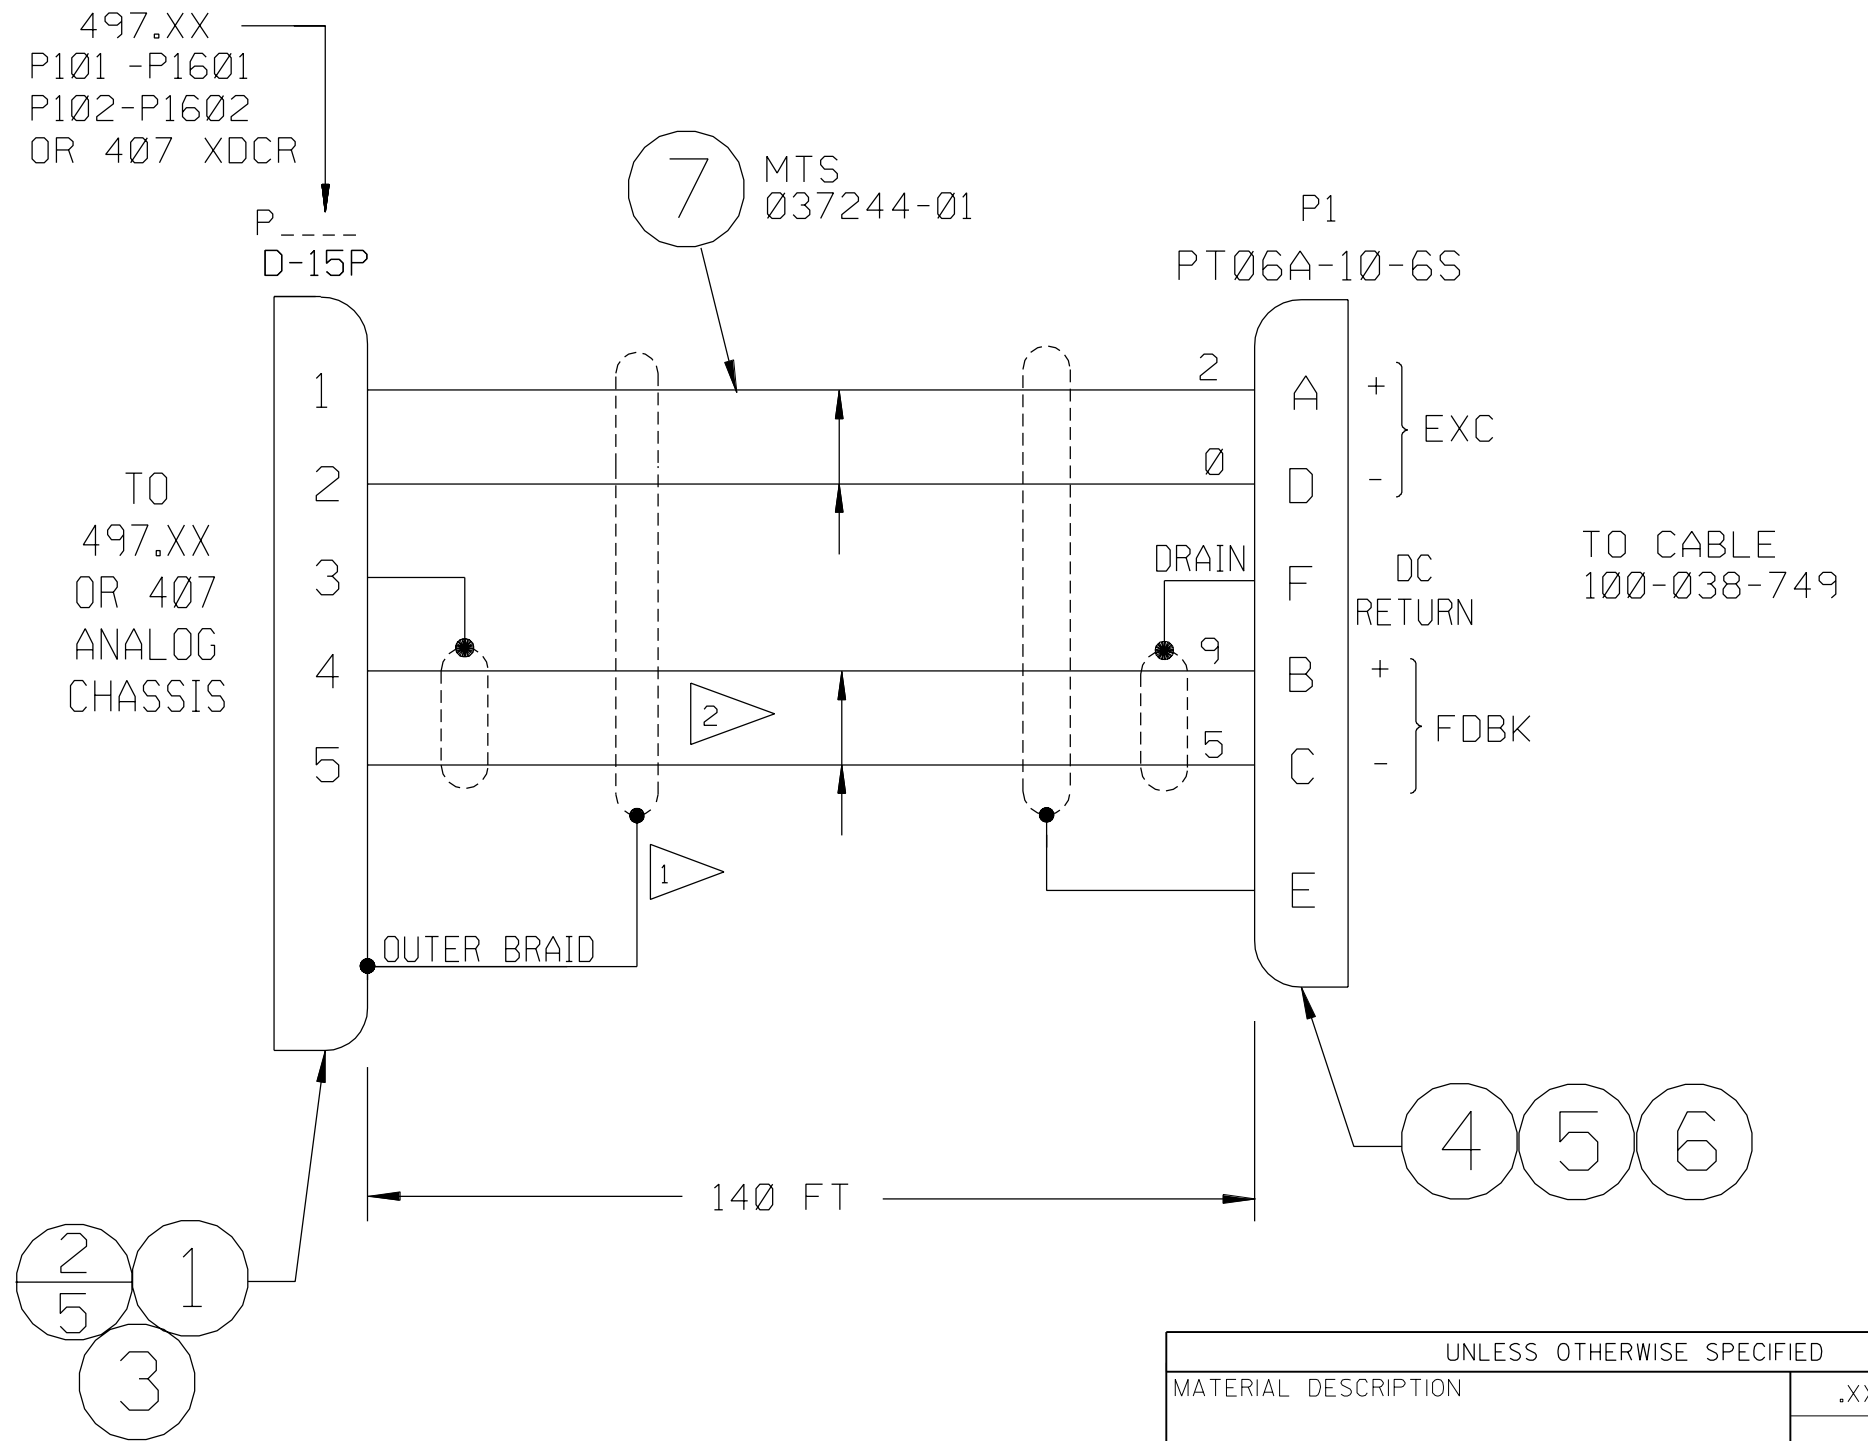

NOTE:

1 FOLD OUTER BRAIDED SHIELD OVER CABLE JACKET IN BACKSHELL CLAMP AREA AND APPLY CLAMP OVER THE BRAID.

2 PHASING IS ACCOMPLISHED ON 497 MODULE, SEE INSTRUCTION MANUAL.

UNLESS OTHERWISE SPECIFIED						of the recipient.			
MATERIAL DESCRIPTION			.XXX HOLE SIZE TOLERANCE			DRAWN DCJ	CHECK	ENGR RLL	MFG
MATERIAL SIZE			0.000 TO .750 +.010/- .002		OVER .750 TO 1.500 +.015/- .003	DATE 8-1-00	DATE	DATE 8-00	DATE
FINISH			MASK 	GENERAL TOLERANCES	TITLE CABLE ASSEMBLY- TEMPO XDCE - 140FT				
• THREAD DEPTHS ARE TO MIN FULL THDS • DRILL DEPTHS ARE TO FULL DIA • REMOVE BURRS AND SHARP EDGES • DO NOT SCALE PRINT		SCALE NONE	GENERAL TOLERANCES	ANGLE ±2°					
		MACHINED SURFACES 180 ✓	GENERAL TOLERANCES	X/Y ±1/4					
			GENERAL TOLERANCES	.X ±.1					
			GENERAL TOLERANCES	.XX ±.03					
			GENERAL TOLERANCES	.XXX ±.010					
 MTS SYSTEMS CORPORATION EDEN PRAIRIE, MINNESOTA U.S.A. ©			THIRD ANGLE PROJ. 	PRODUCT CODE ASDPRJ		SIZE B	NUMBER 100-043-539		REV A
SHEET 1 OF 1									