
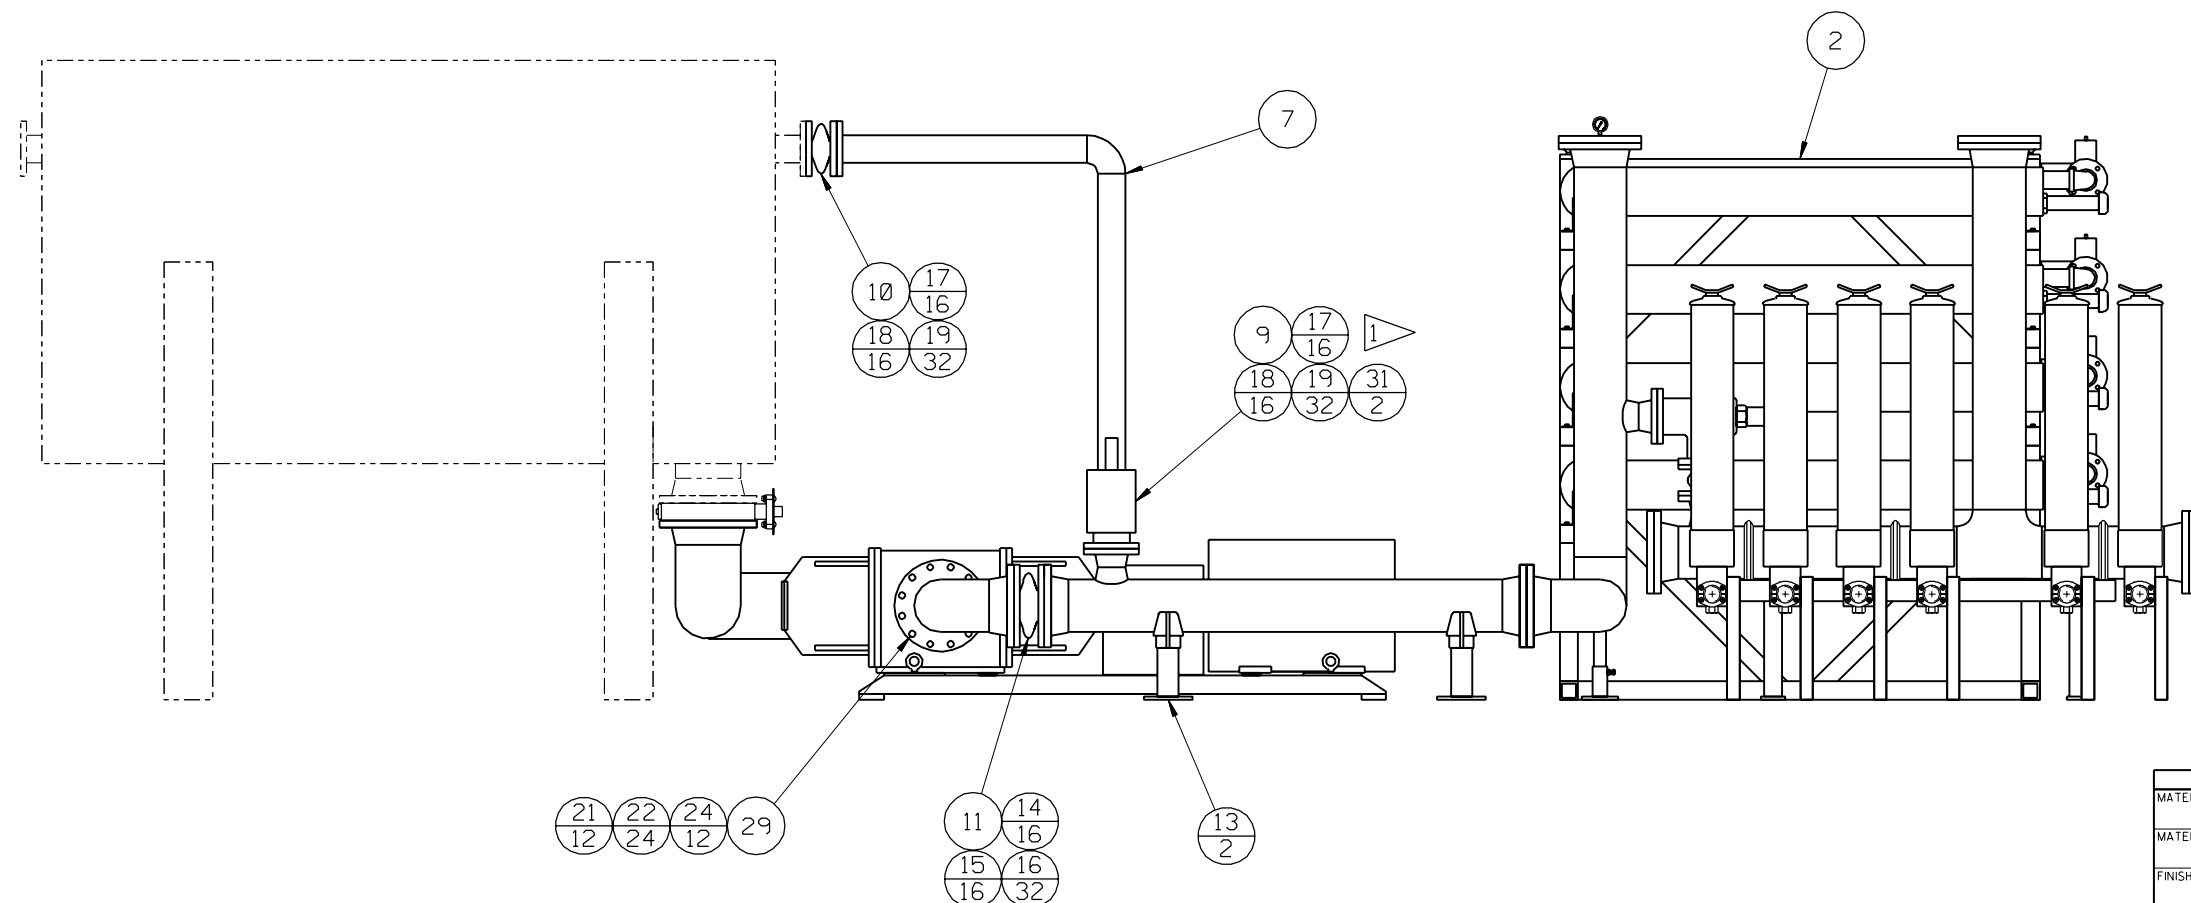


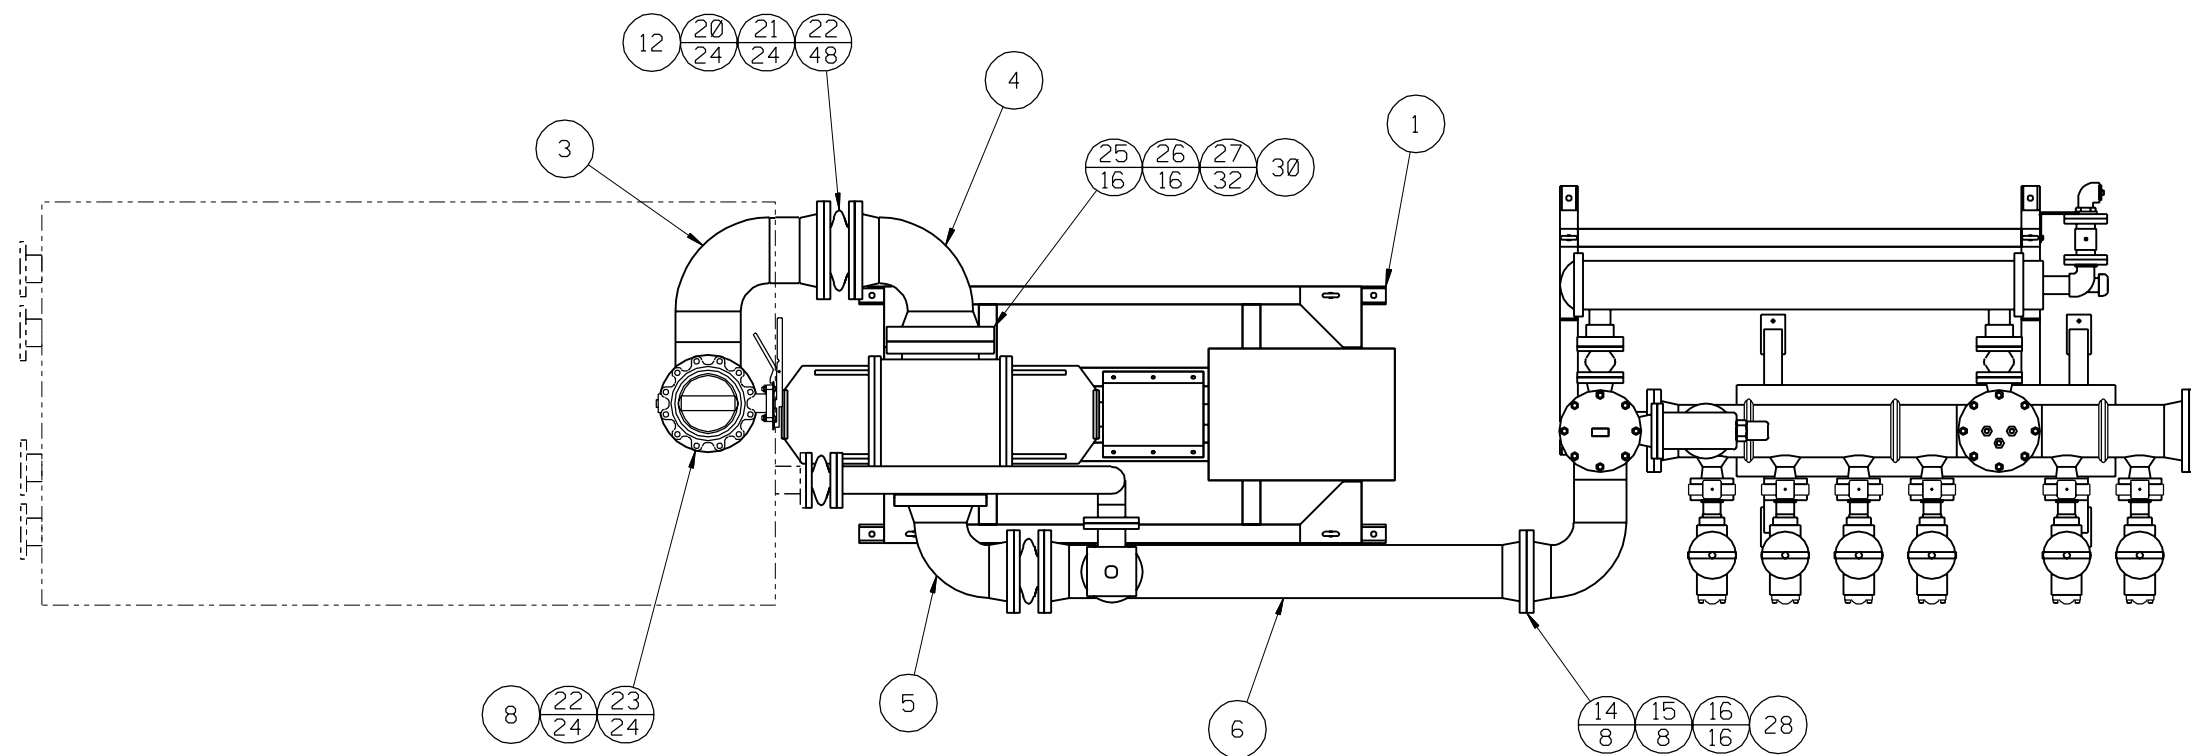

NOTES:

- 1 SET TO CRACK OPEN AT 100 PSI (6.8 BAR).
STAMP METAL TAG 100 PSI (6.8 BAR) & WIRE TO VALVE.

[illegible]

SOURCE/REF.
DRAWING:

PROPRIETARY DATA

The information and design(s) disclosed herein are the property of MTS Systems Corporation and may not be used, reproduced or disclosed in any form except as granted in writing by MTS Systems Corporation. This restriction excludes information that is in the public domain or was legitimately in the prior possession of the recipient.

UNLESS OTHERWISE SPECIFIED						Signatures are required prior to possession of the recipient.			
MATERIAL DESCRIPTION			.XXX HOLE SIZE TOLERANCE 0.000 TO .750 +0.019/-0.002		OVER .750 TO 1.500 +0.015/-0.003		DRAWN RWR	CHECK ENR JWI	MFG
MATERIAL SIZE							DATE 6-8-95	DATE	DATE 6-95
FINISH MASK			ANGLE ±2° 		TITLE SUPERCHARGE PIPING ASSY				
• THREAD DEPTHS ARE TO MIN FULL THDS • DRILL DEPTHS ARE TO FULL DIA. • REMOVE BURRS AND SHARP EDGES • DO NOT SCALE PRINT			SCALE 1/15 MACHINED SURFACES		NEXT LEVEL		SIZE D	NUMBER 510187-01	REV C
MTS SYSTEMS CORPORATION EDEN PRATYB.MNNE50TA JSA.©			THIRD ANGLE		PRODUCT CODE HMPGXX		SHEET 1 OF 1		