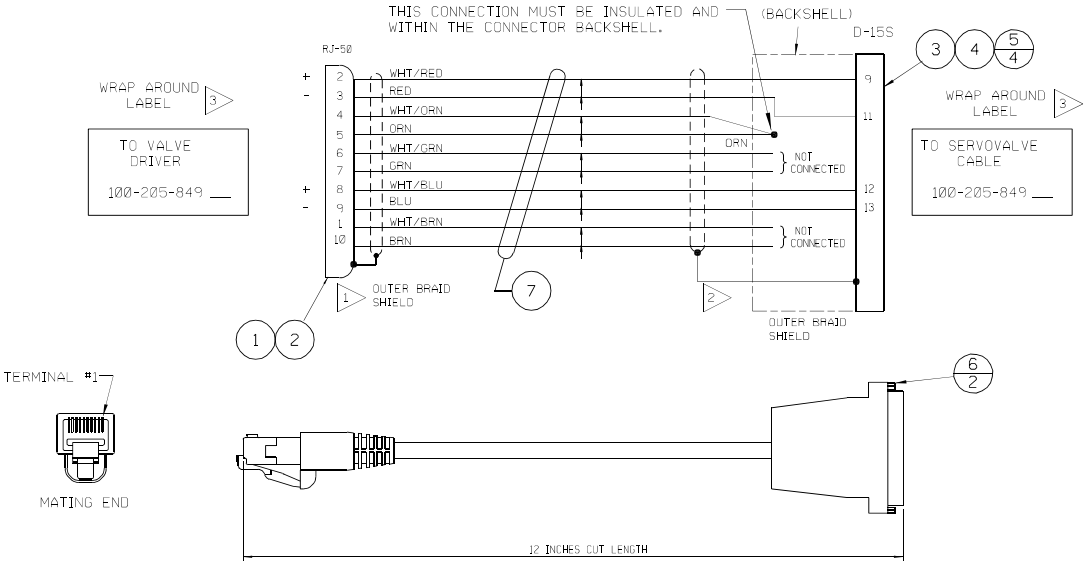

NOTES:

1. FOLD OUTER BRAID SHIELD OVER CABLE JACKET. WHEN CRIMPING MODULAR PLUG, 360° OF BRAID MUST MAKE CONTACT WITH THE MODULAR PLUG SHIELD.

2. FOLD OUTER BRAID SHIELD OVER CABLE JACKET. FASTEN BRAID UNDER BACKSHELL CLAMP.

3. LABEL TO INCLUDE INFORMATION AS SHOWN, PART NUMBER, AND CURRENT REVISION LEVEL.

4. LOCATE RoHS LABEL, ITEM #8, IN THE CENTER OF THE CABLE ASSEMBLY.

5. ALL COMPONENTS USED IN THIS ASSEMBLY ARE EU RoHS DIRECTIVE 2002/95/EC COMPLIANT.



4 8 RoHS COMPLIANT LABEL

REVISIONS

DESCRIPTION	DRAWN	ENGR	DATE	LETTER	ECN NO.
D15 PIN 9 WAS 11 PIN 11 WAS 9	SRN	KJK	3-25-09	B	RULE 1
ADDED ITEM 8 ROHS LABEL ADDED NOTES 4 & 5 R♦ 6597	MRI	ARP	8/3/09	C	RULE 1
BOM CHANGE ONLY: CHG ITEM 6 FROM 011-149-328 (SCREWLOCKS) TO 010-077-817 (STANDOFFS)	ETV	ARP	9-3-13	D	5000013398
IN DETAIL REMOVED BACK PORTION SHOWN OF LOCKSCREW	MRI	ARP	1/3/14	E	5000016890

SOURCE/REF DRAWINGS 100-195-614

PROPRIETARY DATA
The information and designs disclosed herein are the property of MTS Systems Corporation and may not be used, reproduced or disclosed in any form except as granted in writing by MTS Systems Corporation. This restriction excludes information that is in the public domain or was legitimately in the prior possession of the recipient.

UNLESS OTHERWISE SPECIFIED

MATERIAL DESCRIPTION
MATERIAL SIZE
FINISH
MASK

- THREAD DEPTHS ARE TO MIN FULL THDS
- DRILL DEPTHS ARE TO FULL DIA
- REMOVE BURRS AND SHARP EDGES
- DO NOT SCALE PRINT

SCALE NONE
MACHINED SURFACES 125√

GENERAL TOLERANCES

.XXX HOLE SIZE TOLERANCE	
0.000 TO .750 +.001/-.002	OVER .750 TO 1.500 +.015/-.003
ANGLE ±2°	
X/Y ±1/4	
.X ±.1	
.XX ±.03	
.XXX ±.010	

THIRD ANGLE PROJ

MTS SYSTEMS CORPORATION
EDEN PRAIRIE, MINNESOTA U.S.A. ©

DRAWN	CHECK	ENGR	MFG
PJF		KJK	
DATE 10-21-08	DATE	DATE 10-21-08	DATE

TITLE
CABLE- ADAPTER DRIVER, RJ50/D15S, RoHS

NEXT LEVEL
PRODUCT CODE

SIZE	NUMBER	REV
D	100-205-849	E

SHEET 1 OF 1